

PRODUCTS CATALOGUE

Yilane (Shanghai) Industrial Co Ltd



Yilane (Shanghai) Industrial Co Ltd

## ATALOGUE

- |                |   |
|----------------|---|
| <b>page 01</b> | <b>布基胶带 CLOTH DUCT TAPE</b>                   |
| <b>page 04</b> | <b>PVC胶带 PVC TAPE</b>                         |
| <b>page 07</b> | <b>OPP封箱胶带 OPP TAPE</b>                       |
| <b>page 09</b> | <b>美纹纸胶带 MASKING TAPE</b>                     |
| <b>page 12</b> | <b>铝箔胶带 ALUMINUM FOIL TAPE</b>                |
| <b>page 15</b> | <b>双面胶带 DOUBLE SIDED TAPE</b>                 |
| <b>page 18</b> | <b>牛皮纸胶带 KRAFT PAPER TAPE</b>                 |
| <b>page 20</b> | <b>玻纤胶带 FILAMENT TAPE</b>                     |
| <b>page 22</b> | <b>防滑胶带 ANTI SLIP TAPE</b>                    |
| <b>page 25</b> | <b>警示胶带 WARNING TAPE</b>                      |
| <b>page 27</b> | <b>封缄胶带 BAG SEALING TAPE</b>                  |
| <b>page 29</b> | <b>建筑胶带 CONSTRUCTION TAPE</b>                 |
| <b>page 31</b> | <b>高压自粘带 SELF-FUSING TAPE</b>                 |
| <b>page 32</b> | <b>反光膜 REFLECTIVE TAPE</b>                    |
| <b>page 33</b> | <b>防伪胶带 SECURITY TAPE</b>                     |
| <b>page 34</b> | <b>蓄光膜 LUMINOUS FILM</b>                      |
| <b>page 35</b> | <b>线束胶带 WIRE HARNESS TAPE</b>                 |
| <b>page 37</b> | <b>耐高温工业胶带 HIGH TEMPERATURE INDUSTRY TAPE</b> |
| <b>page 39</b> | <b>特殊胶带 SPECIAL ADHESIVE TAPE</b>             |

# C Company Introduction

## **YILAN (Shanghai) INDUSTRY Co. LTD.**

founded in 2020, the office address is set in baoshan District, Shanghai, the factory headquarters is located in Yancheng City, Jiangsu Province, covers an area of 1000 square meters, the existing staff of more than 1000 people, focusing on the production of tape, at present in the whole tape industry is among the best.

The main products of Huipu Adhesive Tape Company are: PVC electrical tape, PVC duct tape, air conditioning tape, BOPP packing tape, duct tape, masking paper tape, brown paper tape, aluminum foil tape, double-sided tape, wire harness tape, construction tape, high temperature tape, greenhouse tape and other kinds of tape.

We have advanced production equipment, including: coating line, paper tube machine, printing press, film machine, glue machine, rewinding machine, slitting machine, cutting machine, packaging machine and so on. In the past 30 years, with high quality products, preferential prices, high-quality service, has won the trust of customers around the world.

The company pursues the tenet of "quality assurance, don't steal one meter", adheres to the service concept of "quality first, service first", strictly implements the ISO9001 quality management system, and will dedicate more high and new quality products to customers. We look forward to cooperating with you!

# 公司介绍 Yilane (Shanghai) Industrial Co Ltd

**宁洋（上海）实业有限公司**，成立于2020年，办公地址设置于上海市宝山区，工厂总部位于江苏省盐城市，占地1000平方米，现有职工1000余人，专注于生产胶带，目前在整个胶带行业名列前茅。惠浦胶带公司现在主营的胶带产品有：PVC电工胶带，PVC管道胶带，空调捆扎带，BOPP包装胶带，布基胶带，美纹纸胶带，牛皮纸胶带，铝箔胶带，双面胶带，线束胶带，建筑胶带，高温胶带，大棚胶带等各类胶带。我们拥有先进的生产设备，其中包括：涂布线，纸管机，印刷机，淋膜机，制胶机，复卷机，分条机，裁切机，包装机等。在过去的30年里，凭借着高质量的产品，优惠的价格，优质的服务，取得了全球客户的信赖。公司奉行：“品质保证，不偷一米”的宗旨，坚持“质量为先，服务至上”的服务理念，严格执行ISO9001质量管理体系，将以更多高新优质的产品奉献给客户，惠浦期待与您合作！



# CLOTH DUCT TAPE 布基胶带

## 构成及特点

是以聚乙烯与纱布纤维的热复合为基材，涂热熔型压敏胶或橡胶，具有耐老化、耐高温、耐寒等特点。

## 主要用途

管道的密封，缝合，拼接、物品表面的保护、铁道、车辆，造船、机电、机械、建筑、修补、装订、色分和记号等。

## FEATURE

With polyethylene and gauze fiber thermal composite as the base material, coated with hot melt pressure sensitive adhesive natural rubber glue, with aging resistance, temperature resistance and cold resistance.

## MAIN USAGE

Pipe sealing, stitching, surface protection of railway vehicles, shipbuilding, mechanical and electrical construction, repair, binding, color marks, etc

## CATEGORIES 产品分类

### General Purpose Cloth Duct Tape 一般布基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
CT15	hot melt	150±10um	8↑#	14N/in↑	50N/in↑
CT16	hot melt	160±10um	10↑#	15N/in↑	65N/in↑
CT18	hot melt	180±10um	10↑#	17N/in↑	70N/in↑
CTR	natural rubber	230±10um	15↑#	8N/in↑	70N/in↑



## Matt Gaffer Cloth Duct Tape 舞台布基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
GAF30	hot melt	300±10um	23↑#	9N/in↑	95N/in↑
GAF21	hot melt	210±10um	10↑#	15N/in↑	65N/in↑
GAF25	hot melt	250±10um	10↑#	17N/in↑	70N/in↑



### 主要用途

适用于视听器材、电视、摄影器材、KTV、录音室、舞台、电影行业的捆扎,也常用于楼梯、出口、舞台方向的标记。

### MAIN USAGE

Suitable for audio-visual equipment, TV photography equipment, KTV recording studio stage film industry binding, also often used for marking the direction of the stair exit stage.

## Printing Cloth Duct Tape 印刷布基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
CTP	hot melt	210um	8↑#	18N/in↑	65 N/in↑



### 主要用途

用于手工DIY制作,装饰,礼品包装,形象广告,书籍保护,制作钱包等。

### MAIN USAGE

For DIY, decoration, gift wrapping, image advertising, book protection, wallet making, etc

## Fluorescent Gaffer Tape 荧光布基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
FGT	natural rubber	300±10um	22↑#	18N/in↑	14N/in↑



### 主要用途

适用于文具, 室内装饰或可用于指示工厂, 办公室或学校中各种设施的指示。

### MAIN USAGE

Apply to stationery, upholstery or can be used to indicate various facilities in factories, offices or schools.

## Camouflage Cloth Tape 迷彩布基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
CCT	hot melt	280±um	8↑#	14.7N/in↑	343N/in↑



### 主要用途


适用于户外保护或单兵装备减少灰尘, 化学液体等对设备的损害, 或在武器, 配件, 电筒, 望远镜, 刀具等上的缠固, 提高防滑性能。

### MAIN USAGE

Suitable for outdoor protection or individual equipment to reduce dust, chemical liquid and other damage to equipment, or in weapons, accessories, torches, telescopes, knives, etc., to improve the anti-slip performance.

## Double Sided Carpet Tape 双面地毯布基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	耐温 (Service Temperature)	抗拉力 (Tensile Strength)
DESCT160	hot melt	160um	20↑#	-20+100 °C	80N/in↑
DESCT200	hot melt	200um	20↑#	-20+100 °C	70N/in↑
DESCT250	hot melt	250um	20↑#	-20+100 °C	65N/in↑
DESCT280	hot melt	280um	20↑#	-20+100 °C	60N/in↑
DESCT300	hot melt	300um	20↑#	-20+100 °C	55N/in↑

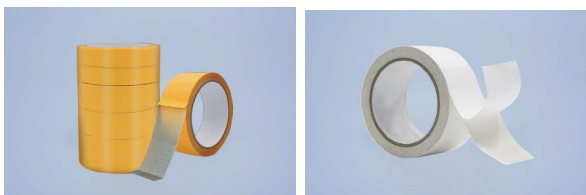

### 主要用途

具有高粘性, 结实耐用强度大, 多用于婚庆, 酒店, 展会等各种地毯拼接及管道的缠绕。

### MAIN USAGE

With high viscosity, strong and durable strength, widely used for wedding, hotel, exhibition and other carpet stitching and pipe winding.

## P.V.C Tape

## PVC胶带

### 构成及特点

具有良好的绝缘、耐燃、耐电压、耐寒等特性。

### 主要用途

适用于汽车配线、电线缠绕、绝缘保护等。

### FEATURE

It has good insulation, fire resistance, voltage resistance and cold resistance.


### MAIN USAGE

Suitable for automotive wiring, wire winding, insulation protection, etc.

## ● CATEGORIES 产品分类

### PVC Electrical Insulation Tape PVC电工绝缘胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)	伸长率 (Elongation)
ET12	rubber	120um	3N/in ↑	4.7N/in ↑	150%
ET13	rubber	130um	3N/in ↑	4.7N/in ↑	150%
ET15	rubber	150um	3.5N/in ↑	4.7N/in ↑	170%
ET18	rubber	180um	3.5N/in ↑	4N/in ↑	190%

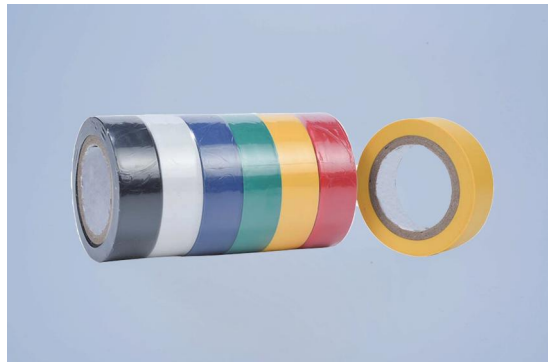



## PVC Duct Tape PVC管道胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
DT13	rubber	130u	3N/in ↑	40N/in ↑
DT15	rubber	150u	3.25N/in ↑	45N/in ↑
DT20	rubber	180u	3.5N/in ↑	50N/in ↑
DT50	rubber	200u	3.75N/in ↑	55N/in ↑



### 主要用途


适用于各种天气条件，防腐、耐热、保温，也用于各种管道及管接头的缠绕保温保护。

### MAIN USAGE

Suitable for all kinds of weather conditions, anti-corrosion, heat resistance, heat preservation, also used for all kinds of pipe and pipe joint winding heat preservation protection.


## PVC Air Conditioner Tape 空调捆扎带

品名 (Code)	厚度 (Thickness)	伸长率 (Elongation)	基重 (Basis Weight)	抗拉力 (Tensile Strength)
AC-90	90um	100%	150g/sm	4N/in ↑
AC-100	100um	100%	160g/sm	4.5N/in ↑
AC-130	130um	150%	190g/sm	6N/in ↑
AC-150	150um	200%	210g/sm	7N/in ↑



### 主要用途

适用于空调管道缠绕包扎等，主要起到空调管路的保护作用。



### MAIN USAGE

It is suitable for wrapping air conditioning pipes, mainly playing a protective role in air conditioning pipes.

## PVC Warning Tape PVC警示胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
PWT-13	rubber	130um	100%	6N/in ↑
PWT-14	rubber	140um	150%	7N/in ↑
PWT-15	rubber	150um	180%	8N/in ↑



### 主要用途

适用于风管、水管、输油管等地下管路的防腐保护, 斜纹印刷胶带可用于地面、立柱、建筑、交通等区域的警示标志。

### MAIN USAGE

Suitable for air pipe, water pipe, pipeline and other underground pipeline anti-corrosion protection. Twill printing tape can be used for warning signs on the ground, columns, buildings, traffic and other areas.


## PVC Easy Tear Tape PVC易撕胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
ETT13	rubber	130um	130%	2.5N/in ↑	45N/in ↑
ETT15	rubber	150um	130%	2.5N/in ↑	50N/in ↑



### 主要用途

适用于包装产品, 固定产品, 起到保护作用。

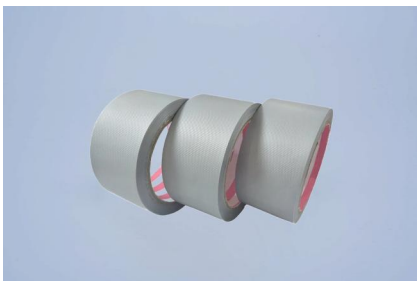

### MAIN USAGE

Suitable for packaging products, fixed products, play a protective role.

# OPP TAPE

# OPP胶带

## 构成及特点

以聚丙烯薄膜为基材，具有高抗拉伸力、质轻、无毒无味、环保、使用范围广等优点。

## 主要用途

适用于封箱固定、捆扎等各种用途。

## FEATURE

Polypropylene film as base material ,with advantages of high tensile strength, light weight, non-toxic ,odorless, environment protection,and wide range of use.

## MAIN USAGE

It is suitable for various uses such as sealing and fastening.

## CATEGORIES 产品分类

### General Opp Packing Tape OPP封箱胶带

产品种类 (Type)	胶水 (Glue)	厚度 (Thickness)	剥离力 (Peel Adhesive)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
封箱胶带 (Packing Tape)	acrylic	35-90um	4N/in ↑	100%	60-130N/in
低噪音胶带 (Low Noise Tape)	acrylic	35-90um	4N/in ↑	100%	60-130N/in
超透胶带 (Super Clear Tape)	acrylic	35-50um	4N/in ↑	100%	60-130N/in
热熔胶胶带 (Hot Melt Tape)	hot melt	38-90um	9N/in ↑	100%	70-130N/in
文具胶带 (Stationery Tape)	acrylic	35-50um	4N/in ↑	100%	60-100N/in
隐形胶带 (Invisible Tape)	acrylic	40-50um	4N/in ↑	100%	60-100N/in



## Wrapping Film 缠绕膜



### 主要用途


以PE为基材,是一种拉伸强度、抗撕裂强度较高又有着一定的自粘性的透明包装材料,可以防潮、防尘、防破坏。

### MAIN USAGE

Polyethylene as the base material, with high tensile strength, good tear resistance and a certain degree of self adhesion, which can prevent moisture, dust and damage.

## Metalized OPP Tape OPP镀铝膜胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
MOP40	acrylic	40um	4N/in ↑	60-100N/in
MOP45	acrylic	45um	4.5N/in ↑	65-100N/in
MOP50	acrylic	50um	5N/in ↑	70-100N/in

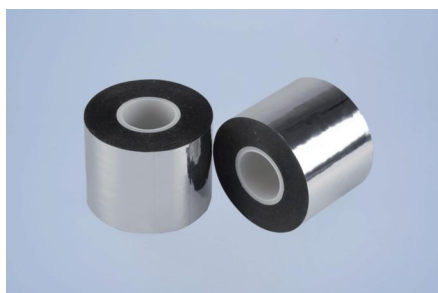

### 主要用途

主要用于保温管道的包扎,具有较好的附着力和较强的拉伸度,光泽度好,能够很好地阻隔管道透湿,在地暖采暖、反光、建材等新型行业也发挥着重要作用。



### MAIN USAGE

Mainly used for binding heat preservation pipes. It has high adhesion, strong tensile strength, good glossiness, and well block the moisture permeability of pipes. It also plays an important role in floor heating, reflective, building industries.

# Masking TAPE

## 美纹纸胶带

### 构成及特点

以美纹纸和压敏胶水为主要原料，涂以防粘材料而制成的卷状胶粘带。具有耐高温、抗化学溶剂佳、高粘着力、柔软服贴和再撕不留残胶等特性。

### FEATURE

It is a kind of rolling adhesive tape made of paper and pressure sensitive glue as the main raw material. It has the characteristics of high temperature resistance, good chemical solvent resistance, high adhesive force, soft adhesion and no residual glue.

### 主要用途

适用于各类装修行业、电子行业、工业、鞋业等其它用途，有良好的遮盖和保护性。

### MAIN USAGE

Suitable for all kinds of decoration industry, electronics industry, industry, footwear and other uses, with good cover and protection.

## CATEGORIES 产品分类

### General Purpose Masking Tape 通用型美纹纸胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
MT13	rubber	130-140um	6↑#	8%	60N/in↑
MT14	rubber	140-150um	8↑#	8%	60N/in↑
MT15	rubber	150-160um	8↑#	8%	60N/in↑



## High Temperature Auto Masking Tape 耐高温美纹纸

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	耐温 (Temperature Resistance)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
AMT80	rubber	130-140um	80°C	5N/in ↑	50N/in ↑
AMT120	rubber	160-170um	120°C	6N/in ↑	65N/in ↑
AMT150	rubber	170-180um	150°C	6N/in ↑	70N/in ↑



### 主要用途

汽车及家具和一般涂装遮蔽加工、PCB板固定钻孔,烤漆遮蔽保护、陶瓷电容器及各种电子零件制程用。



### MAIN USAGE

Automotive and furniture and general coating masking processing, PCB board fixed drilling, paint shielding protection, ceramic capacitors and various electronic parts.


## UV Resistant Masking Tape 抗UV美纹纸胶带

品名 (Code)	颜色 (Color)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
UVMATB	blue	acrylic	125-135um	5 ↑ #	3N/in ↑	60N/in ↑
UVMATY	yellow	acrylic	125-135um	5 ↑ #	3N/in ↑	60N/in ↑
UVMATG	green	acrylic	125-135um	5 ↑ #	3N/in ↑	60N/in ↑



### 主要用途

耐高温抗紫外线十四天不残胶,用于装潢、喷漆、汽车烤漆等的涂装遮蔽及半导体元件固定等行业。



### MAIN USAGE

High temperature anti UV 14 days no residual glue, used for decoration, painting, auto paint coating and semiconductor component fixing industries.

## Washi Paper Tape 和纸胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
WPT09	acrylic	90-110um	10↑#	3N/in↑	70N/in↑
WPT10	acrylic	100-110um	8↑#	3N/in↑	65N/in↑
WPT12	solvent	120-130um	8↑#	3N/in↑	70N/in↑



### 主要用途

广泛利用在黏贴纸张、美化、布置、DIY等用途。

### MAIN USAGE

Widely used in adhesive paper, beautification, layout, DIY and other purposes.

## Pre-taped Masking Film 遮蔽膜胶带

产品种类 (Type)	品名 (Code)	胶带厚度 (Tape Thickness)	膜 (Film)	膜厚度 (Fim Thickness)
Masking Film	MSF130	130±10um	LDPE	6.5um
Washi Film	WSF110	110±10um	LDPE	6.5um
Kraft Paper Film	KPF120	120±10um	LDPE	6.5um
Cloth Duct Film	CDF280	280±10um	LDPE	6.5um
Uvioresistant Film	UVF140	140±10um	LDPE	6.5um
Car Painting Film	CPF160	160±10um	LDPE	6.5um



### 主要用途

主要用于汽车、家具、等产品等喷漆时遮蔽挡油漆、遮挡涂料及室内装潢用。



### MAIN USAGE

It is mainly used for shielding paint, shielding paint and interior decoration when painting cars, furniture and other products.

# Aluminum Foil Tape 铝箔胶带

## 构成及特点

以铝箔为基材, 涂以热熔胶油胶或水胶, 耐酸碱、耐油污、抗电磁、抗干扰、具有抗老化等功效。

## 主要用途

适用于制冷, 需反射的场合, 如室内空调管道, 冰箱, 热水器, 屋顶防水, 修补管道。

## FEATURE

Aluminum foil as the base material, the way to hot melt adhesive oil adhesive or water adhesive, acid and alkali resistance, oil resistance, anti-electromagnetic, anti-interference, with anti-aging and other effects.

## MAIN USAGE

Suitable for refrigeration, reflective occasions, such as indoor air conditioning pipes, refrigerators, water heaters, roof waterproof, repair pipes.

## CATEGORIES 产品分类

### Pure Aluminum Foil Tape 一般铝箔胶带

品名 (Code)	胶水 (Glue)	铝箔厚度 (Alu Thickness)	总厚度 (Total Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
AFH1850	hot melt	18um	50um	5↑#	12N/in↑	26N/in↑
AFH2255	hot melt	22um	55um	5↑#	15N/in↑	29N/in↑
AFA2255	acrylic	22um	55um	5↑#	12N/in↑	33N/in↑
AFA2565	acrylic	25um	65um	5↑#	12N/in↑	33N/in↑
AFS1845	solvent	18um	45um	5↑#	14N/in↑	39N/in↑
AFS2255	solvent	22um	55um	5↑#	16N/in↑	45N/in↑





## Aluminum Foil Tape Without Release Paper 无衬纸铝箔


品名 (Code)	胶水 (Glue)	铝箔厚度 (Alu Thickness)	总厚度 (Total Thickness)	伸长率 (Elongation)	初粘力 (Tack)	抗拉力 (Tensile Strength)
AFW2550	acrylic	25um	50um	3%	18↑#	45N/in↑
AFW3060	acrylic	30um	60um	3%	20↑#	50N/in↑
AFW3570	solvent	35um	70um	3%	20↑#	50N/in↑
AFW4080	solvent	40um	80um	3%	20↑#	50N/in↑

### 主要用途

适用于冰箱、冰柜制冷机内散热片的固定，消除、屏蔽电子产品的电磁波干扰等。

### MAIN USAGE

It is suitable for fixing the heat sink in refrigerator and freezer, eliminating and shielding the electromagnetic wave interference of electronic products.

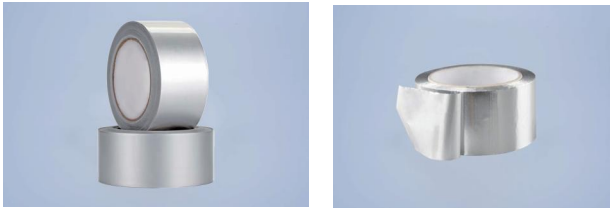

## Reinforced Aluminum Foil Tape 夹筋铝箔胶带

铝箔种类 (Alu Foil Type)	品名 (Code)	胶水 (Glue)	铝箔厚度 (Alu Foil Thickness)	伸长率 (Elongation)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
FSK铝箔 (FSK)	FSK	hot melt	7u	3%	20N/in↑	70N/in↑
5*5网格铝箔 (5*5 Reinforced)	AFM	hot melt	18u	5%	18N/in↑	120N/in↑
玻纤布铝箔 (Aluglass Cloth)	AGC	solvent	18u	1%	14N/in↑	200N/in↑
PE夹筋铝箔 (PE Mesh)	PEM	solvent	20u	5%	12N/in↑	150N/in↑



## PET-Foil Tape PET铝箔胶带

品名 (Code)	胶水 (Glue)	PET厚度 (PET Thickness)	铝箔厚度 (Alu Foil Thickness)	剥离力 (Peel Adhesive)
PFT0755	solvent	12um	7um	16N/in ↑



### 主要用途

隔热层及出口机电产品, 玻璃包装, 大型设备, 精密仪器的真空包装, 阻隔水汽及热量对机器设备的侵蚀, 防止生锈。

### MAIN USAGE

Heat insulation layer and export mechanical and electrical products, glass packaging, large equipment, precision instrument vacuum packaging, prevent water vapor and heat erosion of machinery and equipment, prevent rust.

## PP-Scrim Kraft Tape 白膜夹筋胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	耐温 (Service Temperature)	抗拉力 (Tensile Strength)
PSKT170	solvent	170um	20 ↑ #	-30-80°C	185N/in ↑



### 主要用途

空调行业用于白色聚丙烯-毛布-牛皮纸面夹胶玻璃纤维毡、风管板接缝和接缝的连接和密封;以及修复金属建筑绝缘材料中损坏的饰面。

### MAIN USAGE

HVAC industry for joining and sealing White Polypropylene-Scrim-Kraft Facing laminated fiberglass blanket /duct board joints and seams; and repairing damaged PP-Scrim-Kraft Facing in metal building insulation.

# Double Sided Tape 双面胶带

## 构成及特点

以棉纸、PET、PVC膜、无纺布、泡棉、亚克力泡棉、薄膜等等为基材，有耐蒸气，耐老化，持久的粘合力等特点。

## FEATURE

With cotton paper, PET, PVC film, non-woven fabric, foam, acrylic foam, film and so on as the base material, steam resistance, aging resistance, durable adhesion and other characteristics.

## 主要用途

一般广泛用于皮革、铭板、文具、电子、汽车边饰固定、鞋业、制纸、手工艺品粘贴定位等用途。

## MAIN USAGE

Generally widely used in leather, nameplate, stationery, electronics, car edge fixing, footwear, paper, handicrafts paste positioning and other uses.

## CATEGORIES 产品分类

### Double Sided Tissue Tape 双面棉纸胶带


品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	保持力 (Holding Power)
DTS01	hot melt	80u	10↑#	15N/in↑	≥2h
DTS02	hot melt	90u	10↑#	15N/in↑	≥2h
DTS03	acrylic	90u	12↑#	12N/in↑	≥10h
DTS04	solvent	70u	6↑#	14N/in↑	≥2h
DTS05	solvent	80u	6↑#	15N/in↑	≥6h



## Double Sided Foam Tape

## 双面泡棉胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)
亚克力泡棉 (Acrylic Foam)	hot melt	100um	10↑#	17N/in↑
EVA泡棉 (EVA Foam)	hot melt	150um	10↑#	18N/in↑
PE泡棉 (PE Foam)	hot melt	200um	10↑#	18N/in↑
纳米胶带 (Nano Tape)	hot melt	150um	15↑#	20N/in↑

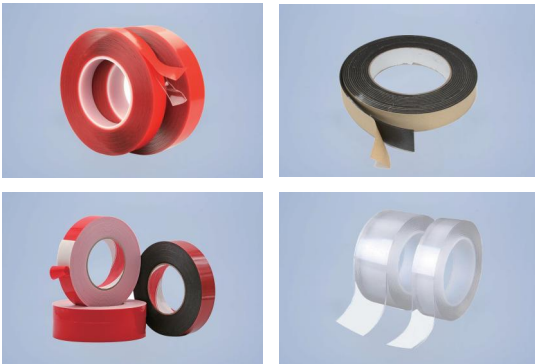

## 主要用途

适合于表面较粗糙和不规则的表面,一般都用于粘贴铭牌、标识、镜子、地图等,也于消音及减震当中,对于电子配件的包装、玻璃板面垫固定等作用。

## MAIN USAGE

It is suitable for rough and irregular surface. It is generally used for pasting nameplates, signs, mirrors, maps, etc. It is also used for noise cancellation and shock absorption, packaging of electronic accessories, and fixing of glass plate surface mat.

## Double Sided PET Tape

## 双面PET胶带

品名 (Code)	基材 (Base)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	耐温 (Temperature Resistance)
DSPT	PET	90-110um	10↑#	17N/in↑	80°C



## 主要用途


适用于薄膜开关上下线路的隔离、粘接;高性能胶黏剂发挥极高的稳定性,适合按键的长期使用要求。

## MAIN USAGE

Suitable for the isolation and bonding of the upper and lower lines of the film switch; High performance adhesive plays an extremely high stability, suitable for the long-term use of the key requirements.

## Double Sided PP Tape 双面PP胶带

品名 (Code)	基材 (Base)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	保持力 (Holding Power)
DSTPP-1	PP	160um	8↑#	10N/in↑	≥2h

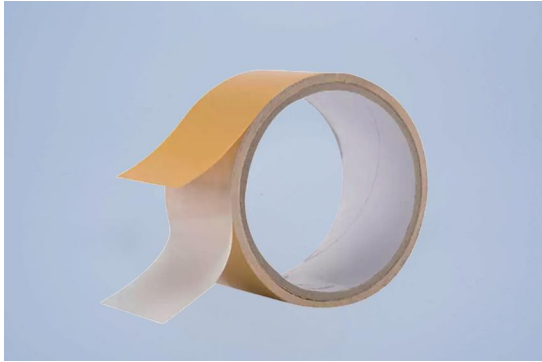

### 主要用途

用于皮革, 铭牌, 文具, 电子, 汽车行业等。

### MAIN USAGE

Used in leather, nameplate, stationery, electronics, automobile industry, etc.

## Double Sided PVC Tape 双面PVC胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)
DSPT1	hot melt	300±10um	100↑#	9N/in↑
DSPT2	hot melt	170±10um	80↑#	18N/in↑
DSPT3	hot melt	190±10um	80↑#	17N/in↑
DSPT4	hot melt	230±10um	90↑#	19N/in↑



### 主要用途

适用于汽车外部不耐热镜片与固定板之间的粘贴, 也适合家具模  
件及装饰件等粘贴。

### MAIN USAGE

It is suitable for pasting heat resistant lenses and fixed plates on the  
exterior of automobiles, as well as furniture modules and decorative parts.

# Kraft Paper Tape 牛皮纸胶带

## 构成及特点

以淋膜牛皮纸为基材,涂以丙烯酸热熔胶或天然橡胶胶水制成,具有防水、粘性强、抗拉强度高、保持力好、不翘边、耐候性能稳定。

## FEATURE

The coating is made of acrylic hot melt glue or natural rubber glue. It has waterproof, strong viscosity, high tensile strength, good retention force, no warping edge and stable weather resistance.

## 主要用途

主要用于纸箱印字的屏蔽,服装表面的处理、重量物体的包装。

## MAIN USAGE

It is mainly used for the screen of carton printing, the treatment of garment surface and the packaging of weight objects.

## CATEGORIES 产品分类

### Self Adhesive Kraft Paper Tape 自粘牛皮纸胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
SKT1	hot melt	120um	3↑#	8N/in↑	90N/in↑
SKT2	natural rubber	130um	3↑#	8N/in↑	90N/in↑
SKT3	acrylic	140um	3↑#	10N/in↑	95N/in↑



## Water Activated Reinforced Kraft Paper 湿水夹筋牛皮纸

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
WRKT3	Wet glue water	130um	3↑#	8N/in↑	90N/in↑



### 主要用途

湿水后可产生很强的粘性, 可对纸箱进行牢固的封口, 是适应国际发展趋势的环保胶带。

### MAIN USAGE

Wet water can produce strong viscosity, can be firmly sealed carton, is to adapt to the international development trend of environmental protection tape.

## Water Activated Kraft Paper 普通湿水牛皮纸

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
WKT13	Wet glue water	130um	3↑#	6.8N/in↑	135N/in↑



### 主要用途

用于各种瓦楞纸板箱、塑箱的密封, 出口纸箱封口或遮盖纸箱字迹, 也用于包装、封箱等。

### MAIN USAGE

Used for all kinds of corrugated cardboard boxes, plastic box sealing, export carton sealing or covering carton writing, also used for packaging, sealing, etc.

## Self-Adhesive Kraft Paper Tape With Writable 自粘无塑可书写牛皮纸

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
SK1	hot melt	130um	3↑#	8N/in↑	90N/in↑



### 主要用途

适用于封箱、包装临时固定、印刷封网版等, 上面可书写字体。

### MAIN USAGE

Suitable for sealing, temporary fixing of packaging, printing sealing plate, etc., which can be written on the font.

# Filament Tape 玻纤胶带

## 构成及特点

以塑料纤维为基材,张力强度极高,不易断裂,粘力极强,包装效果完美且不易松脱,具有高度的耐磨性能及抗拉性能。

## FEATURE

With plastic fiber as the base material, high tensile strength, not easy to break, strong adhesion, perfect packaging effect and not easy to loose, with a high degree of wear resistance and tensile properties.

## 主要用途

该产品被广泛用于重物的捆扎包装以及大桥的缆索捆扎,家电产品的包装,如洗衣机、冰柜等;金属及木制家具的包装。

## MAIN USAGE

The product is widely used in the hole packing of heavy objects, cable bundling of Bridges, and packaging of household appliances, such as washing machines and freezers. Packaging of metal and wooden furniture.

## CATEGORIES 产品分类

### Mono-Directional Filament Tape 条纹玻纤胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesion)	抗拉力 (Tensile Strength)	伸长率 (Elongation)
FTA13	hot melt	130um	5↑#	8N/in↑	300N/in↑	12%
FTA14	hot melt	140um	7↑#	6N/in↑	300N/in↑	12%
FTA15	hot melt	150um	5↑#	10N/in↑	300N/in↑	12%





## Bi-Directional Filament Tape 网格玻纤胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)	伸长率 (Elongation)
FTB12	hot melt	120um	8↑#	6N/in↑	400N/in↑	12%
FTB13	hot melt	130um	10↑#	18N/in↑	500N/in↑	12%
FTB15	hot melt	150um	11↑#	18N/in↑	550N/in↑	12%



### 主要用途

适用于塑料制品及管道捆扎等、防止横向撕裂被黏贴物，不易松散变形。

### MAIN USAGE

Applicable to plastic products and pipe binding, prevent transverse tearing of the adhesive, not easy to loose deformation.

## Double Sided Fiberglass Tape 双面玻纤胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)	伸长率 (Elongation)
FTD20	hot melt	200um	8↑#	15N/in↑	400N/in↑	12%
FTD22	hot melt	220um	12↑#	18N/in↑	400N/in↑	12%
FTD23	hot melt	230um	13↑#	20N/in↑	400N/in↑	12%



### 主要用途

用于钢铁、机械、电器等行业重包装，部件固定或捆扎，防水防腐行业的包扎，用于管道，固定货盘，密封和海运加强封箱。

### MAIN USAGE

Used for heavy packaging, parts fixing or strapping in steel, machinery, electrical and other industries, waterproof and anticorrosive industry bandaging, used for pipeline, pallet fixing, sealing and sea transportation to strengthen sealing.

# Anti Slip Tape

## 防滑胶带

### 构成及特点

由金刚砂与高强耐用的聚合物粘结而成的尺寸稳定的防滑胶带。反面涂有橡胶压敏胶，并覆有保护衬垫。该产品为各种应用场合提供一个经久的防滑表面。

### 主要用途

主要用于工业及商业的干湿，及油滑地面，高人流量及低车流量区域：走廊，生产或储藏仓库，斜坡，楼梯，踏板，机械设备等。

### FEATURE

An anti-slip tape of stable size bonded by emery and high strength and durable polymer. The reverse side is coated with rubber pressure sensitive adhesive and covered with protective liner. The product provides a durable non-slip surface for a variety of applications.


### MAIN USAGE

Mainly used in industrial and commercial dry and wet, and greasy ground, high human flow and low traffic flow areas: corridors, production or storage warehouses, slopes, stairs, pedals, machinery equipment, etc.

## CATEGORIES 产品分类


### General Anti-slip Tape 一般防滑胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	目数 (Mesh)	初粘力 (Tack)	摩擦力 (Frictional Force)
AST80	solvent	80um	80	13↑#	1.13%
AST90	solvent	90um	60	15↑#	1.23%

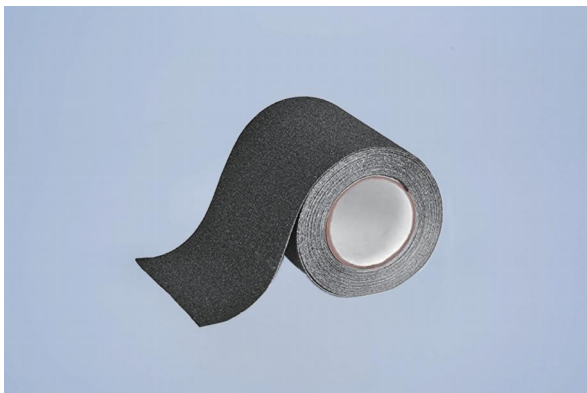

## Anti-slip Glow Tape 防滑夜光胶带

产品种类 (Type)	品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	剥离力 (Peel Adhesive)	摩擦力 (Frictional Force)
全夜光防滑胶带 (Dark Glow Tape)	DGP80	slovent	80um	30%	7.5N/in↑	1.13%
夜光条防滑胶带 (Strip Glow Tape)	SGP80	slovent	80um	30%	7.5N/in↑	1.13%
斜纹夜光防滑胶带 (Twill Glow Tape)	TGP80	slovent	80um	30%	7.5N/in↑	1.13%

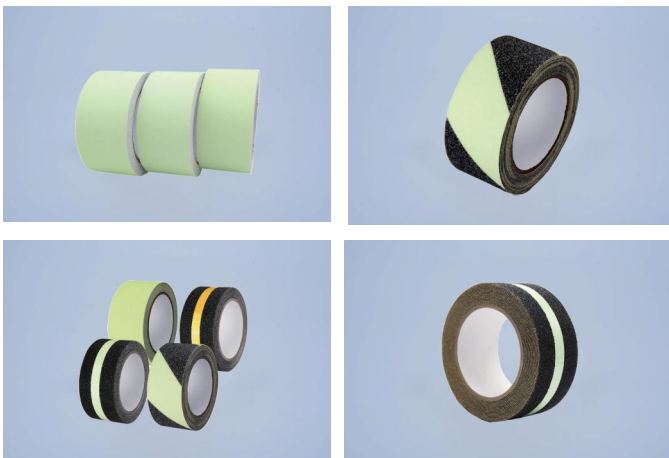

### 主要用途

主要应用在学校、商场、医院、走廊等各种需要防滑的场所，也可以用于巴士、船只、卡车、飞机阶梯，大小性电力设备等。

### MAIN USAGE

It is mainly used in schools, shopping malls, hospitals, corridors and other places that need to be anti-skid. It can also be used in buses, boats, trucks, aircraft stairs, large and small power equipment, etc.

## Anti-slip Reflective Tape 防滑反光胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	剥离力 (Peel Adhesive)	摩擦力 (Frictional Force)
AIT80	solvent	80um	30%	6.5N/in↑	1.13%



### 主要用途

用于道路，汽车，轮船，航道，舞台，台阶和坡道等各种通道和相关机械设备中，起到防滑警示的作用。

### MAIN USAGE

Used in roads, cars, ships, waterways, stages, steps and ramps and other channels and related machinery and equipment, play the role of anti-skid warning.

## Anti-slip PEVA/PU Tape 防滑胶带PEVA

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	摩擦力 (Frictional Force)
ASP90	solvent	90um	3↑#	9N/in↑	1.09%



### 主要用途

洗浴中心、浴室、浴缸等湿滑的地面。

### MAIN USAGE

A wet floor in a bath center, bathroom, bath, etc

## Anti-slip Carpet Tape 防滑地毯胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)
ASCT90	solvent	90um



### 主要用途

易于贴在地毯底部和地板顶部,帮助地毯保持原位和平整。

### MAIN USAGE

Easy to attach to the bottom of the carpet and the top of the floor to help keep the carpet in place and flat.

# Warning Tape

## 警示胶带

### 构成及特点

涂上橡胶型压敏胶制造而成, 具有防水、防潮、耐候、抗蚀、防静电等优点。

### 主要用途

适用于风管、水管、输油管等地下管路的防腐保护, 也可用于地面、立柱、建筑、交通等区域的警示标志。

### FEATURE

Coated with rubber pressure sensitive adhesive, with waterproof, moisture-proof, weather resistance, corrosion resistance, anti-static and other advantages.

### MAIN USAGE

It is suitable for anti-corrosion protection of underground pipelines such as air pipes, water pipes and oil pipelines, and can also be used for warning signs in ground, column, building and traffic areas.

## CATEGORIES 产品分类


### PE Warning Tape PE警示胶带

品名 (Code)	厚度 (Thickness)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
PEW6	60um	260%	15N/in ↑
PEW1	70um	280%	15N/in ↑
PEW2	80um	300%	15N/in ↑



## Cloth Warning Tape 布基警示胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)
CWT28	hot melt	280um	26↑#	22N/in↑	15N/in↑

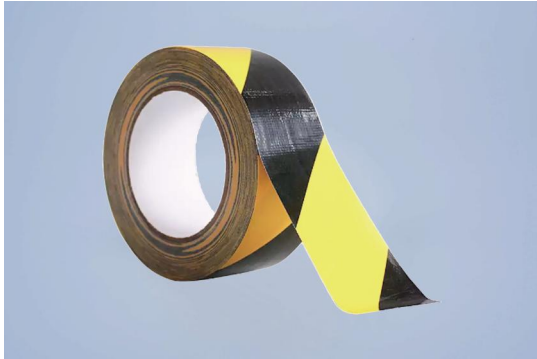

### 主要用途

纸箱封缄、地毯接缝合并、重型捆扎、防水包装、道路警示等。

### MAIN USAGE

Carton sealing, carpet stitching together, heavy binding, waterproof packaging, road warning, etc.

## PET Warning Tape PET警示胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	适用温度 (Applicable temperature)
PEW	acrylic	340um	2.5↑N/in	25.6N/in↑	5-45°C



### 主要用途

易于贴在地毯底部和地板顶部,帮助地毯保持原位和平整。

### MAIN USAGE

Easy to attach to the bottom of the carpet and the top of the floor to help keep the carpet in place and flat.

# BAG SEALING TAPE 封缄胶带

## 构成及特点

水胶、油胶、聚酯膜等构成，具有粘着力好、保持力佳，可重复使用，不脱胶、不残胶，特殊留边、易于撕起等特性。

## FEATURE

Water glue, oil glue, polyester film, etc., with good adhesion, good retention, reusable, no degumming, no residual glue, special edge, easy to tear and other characteristics.

## 主要用途

用于信封、文具、服装等的OPP、PE材质的塑胶袋封口。

## MAIN USAGE

For envelopes, stationery, clothing, such as OPP, PE material plastic bag sealing.

## CATEGORIES 产品分类

### Permanent Bag Sealing Tape 破坏胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	粘合强度 (Adhesion Strenght)	保持力 (Holding Power)
PST	hot melt / solvent	20-30um	300-500g/10mm	>60 Min0.5kg/6.5mm*25mm



## 主要用途

专门用于气泡袋/档案袋/快递袋/信封袋/文件袋/保温带等。

## MAIN USAGE

It is specially used for bubble bag/file bag/express bag/envelope bag/file bag/thermal insulation belt, etc.

## OPP Bag Sealing Tape    OPP封缄胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	粘合强度 (Adhesion Strenght)	保持力 (Holding Power)
OBT	acrylic/solvent	20-25um	50-80g/6.5mm	>3 Min0.5kg/4mm*25mm



### 主要用途

适用于PE,PP各类塑胶袋包装封口用途,OPP封缄胶带可重复使用,使用起来不脱胶也不残胶。

### MAIN USAGE

Suitable for PE,PP all kinds of plastic bag packaging sealing purposes,OPP sealing tape can be reused, use up no degumming nor residual glue.

## PE Bag Sealing Tape    PE封缄胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	粘合强度 (Adhesion Strenght)	保持力 (Holding Power)
EST	acrylic/solvent	8-12um	45-75g/6.5mm	>10 Min0.5kg/6.5mm*25mm



### 主要用途

适用于OPP,PP各类塑胶袋包装封口当中,这种封缄胶带可重复进行使用,而且有不脱胶、不残胶的特性。

### MAIN USAGE

Suitable for OPP,PP all kinds of plastic bag packaging sealing, this kind of sealing tape can be used repeatedly, and has no degumming, no glue residue characteristics.



# CONSTRUCTION REPAIR TAPE 建筑胶带

## ● CATEGORIES 产品分类

### Mesh Joint Tape 网格自粘带

品名 (Code)	目数 (Mesh)	克重 (Weight)	抗拉力 (Tensile Strength)
MJT50	8*7	50g	300N/in ↑
MJT60	8*8	60g	300N/in ↑
MJT70	9*9	70g	300N/in ↑



#### 主要用途


墙面装修,补缝,防开裂,内外墙保温抗裂适用于水泥,石膏,墙体等。

#### MAIN USAGE

Wall decoration, seam repair, anti-cracking, internal and external wall insulation anti-cracking suitable for cement, plaster, wall and so on

### Butyl Tape 丁基胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
BST	rubber	40um	340%	70N/in ↑
BDT	rubber	80um	400%	100N/in ↑

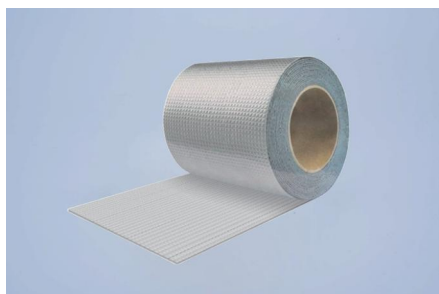

#### 主要用途

新建工程的屋面防水、地下防水、结构施工缝的防水处理及高分子防水卷材搭接密封。

#### MAIN USAGE

Roof waterproofing, underground waterproofing, waterproof treatment of structural construction joints and lap sealing of polymer waterproof coil in the new project.

## Drywall Joint Paper Tape 接缝纸带

品名 (Code)	厚度 (Thickness)	密度 (Density)	重量 (Weight)
DP20	200um	0.65+/-5%/m3	130+/-5%/m2



### 主要用途

拼接缝、阴角及阳角的处理。

### MAIN USAGE

The treatment of joint, Yin Angle and Yang Angle.

## Corner Tape 护角带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	金属宽度 (Metal Width)	金属厚度 (Metal Thickness)	重量 (Weight)
COT22	hot melt	220um	11mm	0.25mm	1450-1500g
COT24	hot melt	240um	11mm	0.25mm	1450-1500g
COT28	hot melt	280um	11mm	0.25mm	1450-1500g



### 主要用途

采用纤维纸上增加镀锌钢带的方式用于墙面阳角加强, 可以提高墙角的抗冲击能力。

### MAIN USAGE

The method of adding galvanized steel strip on fiber paper is used to strengthen the positive corner of the wall, which can improve the impact resistance of the corner.

# Self-fusing Tape 高压自粘带

## ● CATEGORIES 产品分类

### Silicone Rubber Self-fusing Tape 硅橡胶自粘带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
SR05	silicone	50um	500%	2.5N/in ↑



#### 主要用途

用于10KV及以下电线电缆终端和中间接头绝缘保护及通讯电缆接头绝缘密封,也可用于管道保护、修补、防水密封。

#### MAIN USAGE

Play a warning and reminder role, mainly used in roads, cars, ships, waterways, stages, various channels and related machinery and equipment.

### Self Amalgamating Tape 高压橡胶自粘带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
SAT	rubber	76um	800%	1.8N/in ↑



#### 主要用途

用于10KV及以下电线电缆终端和中间接头绝缘保护及通讯电缆接头绝缘密封,也可用于管道保护、修补、防水密封。

#### MAIN USAGE

Play a warning and reminder role, mainly used in roads, cars, ships, waterways, stages, various channels and related machinery and equipment.

# R REFLECTIVE TAPE 反光膜

## 构成及特点

通过调焦后处理的先进工艺制成。它能将远方直射光线反射回发光处,不论在白天或黑夜均有良好的逆反射光学性能。

## FEATURE

Through the advanced technology of post-focusing processing. It can reflect the distant direct light back to the luminous place, no matter in the day or night has a good retroreflection optical performance.

## 主要用途

起警示和提醒作用,主要用于道路,汽车,轮船,航道,舞台,各种通道和相关机械设备中。

## MAIN USAGE

Play a warning and reminder role, mainly used in roads, cars, ships, waterways, stages, various channels and related machinery and equipment.

## CATEGORIES 产品分类

### Reflective Tape 反光胶带

品名 (Code)	厚度 (Thickness)	胶水 (Glue)	材质 (Material)
RTA01	110um	acrylic	PET
RTH02	140um	acrylic	PET
RTS03	250um	acrylic	PET



# SECURITY TAPE 防伪胶带

## 构成及特点

以PET为基材，在PET反面经特殊工艺加工形成一种字模。

## 主要用途

主要用于需循环使用的包装容器上。

## FEATURE

With PET as the base material, a type mould is formed on the reverse side of PET by special process.

## MAIN USAGE

Mainly used for packaging containers that need to be recycled.

## CATEGORIES 产品分类

### Security Tape 防伪胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	剥离力 (Peel Adhesive)	保持力 (Holding Power)
PA-001	rubber	25um	3↑#	100N/in↑	≥12h
PA-002	rubber	36um	3↑#	200N/in↑	≥12h
PA-003	rubber	50um	3↑#	300N/in↑	≥12h



# LUMINOUS FILM

## 蓄光膜

### 构成及特点

利用化学分子结构的特性,以稀土中提取的某种材料为原材料,令其对光线具备一定的吸取、缓慢放光的原理,具有发光初始亮度高,时间长,耐候性能优良。

### FEATURE

By using the characteristics of chemical molecular structure and some material extracted from rare earth as raw material, it can absorb light to a certain extent and emit light slowly. It has high initial luminance, long time and excellent weatherability.

### 主要用途

用在交通领域里可以制作消防安全标志、船舶标志、还有一些安全识别标志等。

### MAIN USAGE

It can be used in the traffic field to make fire safety signs, ship signs, and some safety identification signs.

## CATAGORIES 产品分类

### Luminous Film 蓄光膜

品名 (Code)	厚度 (Thickness)	发光时间 (Fluorescent Lifetime)	剥离力 (Peel strength)	抗拉力 (Tensile Strength)
GT024	370um	>6h	20N/in ↑	24N/in ↑
GT046	380um	>6h	20N/in ↑	24N/in ↑
GT068	390um	>6h	20N/in ↑	24N/in ↑



# WIRE HARNESS TAPE 线束胶带

## ● CATEGORIES 产品分类

### Black Cotton Electrical Insulation Tape 黑色电工布胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)
BCT42	rubber	42um	3↑#



#### 主要用途

能耐50度高温，以聚氯乙烯薄膜为基材，涂以橡胶型压敏胶制造。

#### MAIN USAGE

It can withstand the high temperature of 50 degrees. It is made of polyvinyl chloride film as the base material and coated with rubber pressure sensitive adhesive.

### PVC Wire Harness Tape PVC线束胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	材质 (Material)	耐温 (Temperature Resistance)
PHT1	rubber	100um	PVC	-25-105°C
PHT2	rubber	120um	PVC	-25-105°C



#### 主要用途

用于旅行车、卡车、建筑和农业设备、飞机、飞船及电子设备中线束的持久包缠。

#### MAIN USAGE

Used for durable wrapping of wire harnesses in station wagons, trucks, construction and agricultural equipment, aircraft, spacecraft and electronic equipment.

## PET Fleece Tape PET绒布胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	耐温 (Temperature Resistance)	伸长率 (Elongation)	抗拉力 (Tensile strength)
PFT28	hot melt	300um	-40~125°C	10%	30N/in ↑



### 主要用途

减震降噪性能好,可用于不同材料的隔离和固定,避免不同材料之间碰撞,防止产生噪音。

### MAIN USAGE

Good shock absorption and noise reduction performance, can be used for the isolation and fixing of different materials, avoid collision between different materials, prevent noise.

## PET Polyester Cloth Tape PET涤纶布胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	耐温 (Temperature Resistance)	伸长率 (Elongation)	抗拉力 (Tensile strength)
FCT18	hot melt	180um	-40~150°C	10%	60N/in ↑
FCT25	hot melt	250um	-40~150°C	10%	160N/in ↑



### 主要用途

为汽车线束包缠而特殊设计,是用于电动车或者发动机部位线束的理想产品。

### MAIN USAGE

Specially designed for automotive wiring harness wrapping, it is used for electric vehicle or engine part wiring harness.




# HIGH TEMPERATURE INDUSTRY TAPE 耐高温工业胶带

## ● CATEGORIES 产品分类

### Polyimide Tape 聚酰亚胺胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	伸长率 (Elongation)	抗拉力 (Tensile strength)
PST04	silicone	40um	6↑#	55%	115N/in↑
PST06	silicone	60um	6↑#	55%	125N/in↑
PST07	silicone	75um	6↑#	55%	130N/in↑

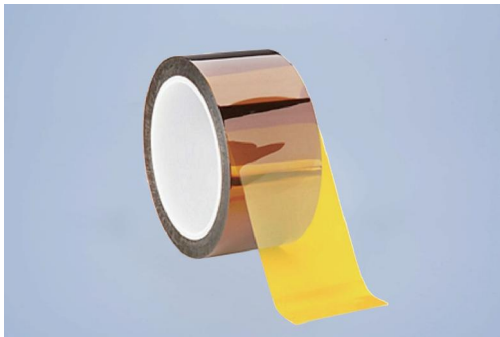

#### 主要用途


适用于电子线路板波峰焊锡遮蔽、保护金手指和高档电器绝缘、马达绝缘，以及锂电池正负极耳固定。

#### MAIN USAGE

Suitable for circuit board wave peak soldering shielding, protective gold finger and high-grade electrical insulation, motor insulation, and lithium battery positive and negative ear fixation.

### Polyester Tape 聚酯胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	伸长率 (Elongation)	抗拉力 (Tensile strength)
GPT06	silicone	60um	6.5↑#	55%	135N/in↑
GPT08	silicone	80um	6.5↑#	55%	140N/in↑
GPT11	silicone	110um	7.5↑#	55%	145N/in↑

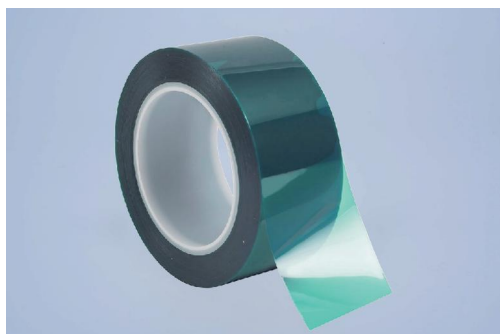

#### 主要用途

主要适用于电缆线材内芯绝缘缠绕增强、线圈包扎及彩管防爆、液晶等离子面板紧固及固定绝缘作用。

#### MAIN USAGE

Mainly used for cable wire inner core insulation winding enhancement, coil dressing, color tube explosion proof, liquid crystal plasma panel fastening and fixed insulation.


## PTFE Tape 特氟龙胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	抗拉力 (Tensile Strength)	耐温 (Temperature Resistance)
PTC	silicone	130um	28↑#	1700N/in↑	-70-260°C
PTF	silicone	130um	25↑#	400N/in↑	-70-260°C



### 主要用途

广泛应用于包装、热塑、复合、封口热合、电子电气等行业。

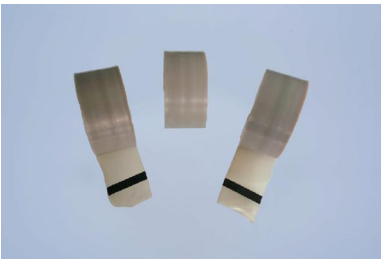

### MAIN USAGE

Widely used in packaging, thermoplastic, composite, sealing heat bonding, electronic and electrical industries.

## Glass Cloth Tape 玻璃布胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	初粘力 (Tack)	伸长率 (Elongation)	抗拉力 (Tensile strength)
FC18	silicone	180um	8↑#	55%	115N/in↑



### 主要用途

玻璃布耐高温胶带可长期经受180°C高温,且拉伸强度大、粘接力强,大量使用于H级马达和变压器线圈引出线包扎。

### MAIN USAGE

Can withstand 180°C high temperature for a long time, strong adhesion, widely used in H class motor and transformer coil lead wire dressing.

# SPECIAL ADHESIVE TAPE

# 特殊胶带

## ● CATEGORIES 产品分类

### Biodegradable Cellophane Tape 可生物降解玻璃纸胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	剥离力 (Peel Strength)	保持力 (Holding Power)	抗拉力 (Tensile Strength)
BCT	acrylic	45um	9N/in ↑	≥24h	93N/in ↑



#### 主要用途

透明基材可彩印彩底, 各种个性化定制, 打包捆绑更紧实、透气性好更环保。

#### MAIN USAGE

Transparent substrate can be color printing color bottom, all kinds of personalized customization, packaging and binding tighter, good air permeability and environmental protection.

### PTFE Thread Tape 生料带

品名 (Code)	厚度 (Thickness)	伸长率 (Elongation)	抗拉力 (Tensile Strength)
PT75	75um	100%	8N/in ↑
PT100	100um	100%	10N/in ↑
PT200	200um	100%	15N/in ↑



#### 主要用途


广泛应用于水处理、天然气、化工、塑料、电子工程等领域。

#### MAIN USAGE

Widely used in water treatment, natural gas, chemical, plastics, electronic engineering and other fields.

## All Weather Green House Tape 大棚胶带

品名 (Code)	厚度 (Thickness)	剥离力 (Peel Adhesive)	抗拉力 (Tensile Strength)	伸长率 (Elongation)
AWT15	150um	5N/in ↑	40N/in ↑	200%

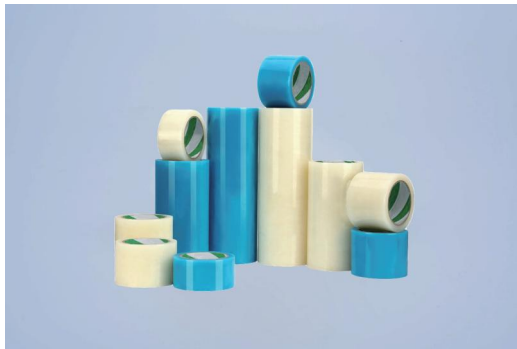

### 主要用途

修补各种长寿塑料, 保温塑料三层EVA大棚膜, pvc塑料、pp袋, LDPE等农用塑料, LDHD塑料袋。

### MAIN USAGE

Repair all kinds of longevity plastic, insulation plastic three layer EVA greenhouse film, pvc plastic, pp bags, LDPE and other agricultural plastics, LDHD plastic bags.

## Mylar Tape 玛拉胶带

品名 (Code)	胶水 (Glue)	厚度 (Thickness)	伸长率 (Elongation)	剥离力 (Peel strength)
MT50	acrylic	50um	150%	300N/in ↑
MT55	acrylic	55um	150%	300N/in ↑
MT60	acrylic	60um	150%	300N/in ↑




### 主要用途

广泛应用于变压器、马达、电容器等各类电机、电子元件之绝缘包扎和开关电源的主板电路和外壳之间的高压隔离。

### MIAN USAGE

Widely used in transformer, motor, capacitor and other kinds of motor, electronic components of insulation wrapping and switching power motherboard circuit and shell between high voltage isolation.

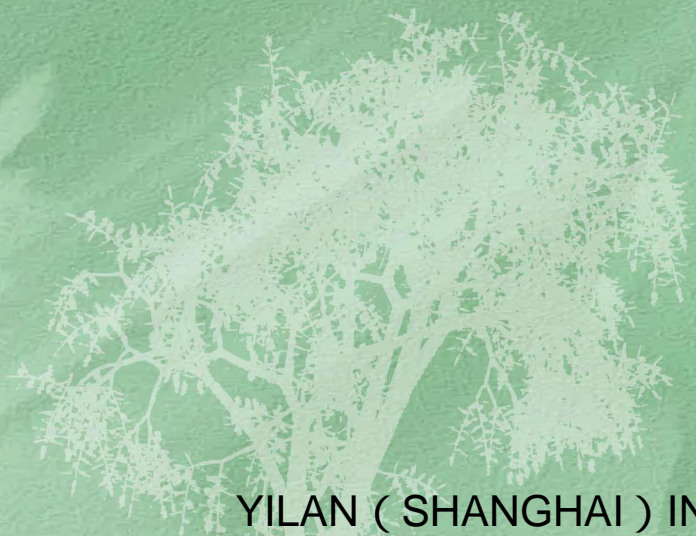

YILAN ( SHANGHAI ) INDUSTRY CO LTD  
宁洋 ( 上海 ) 实业有限公司  
ADD : NO 111 Luxiang RD, BAOSHAN,  
Shanghai  
TEL: 0086-21-66790502  
MAIL: info@partech-packing.com  
www.partech-packing.com